AWWA C509 & C515

Resilient Seated Solid Wedge Gate Valve

Sizes: 2” - 72”

Materials of Construction

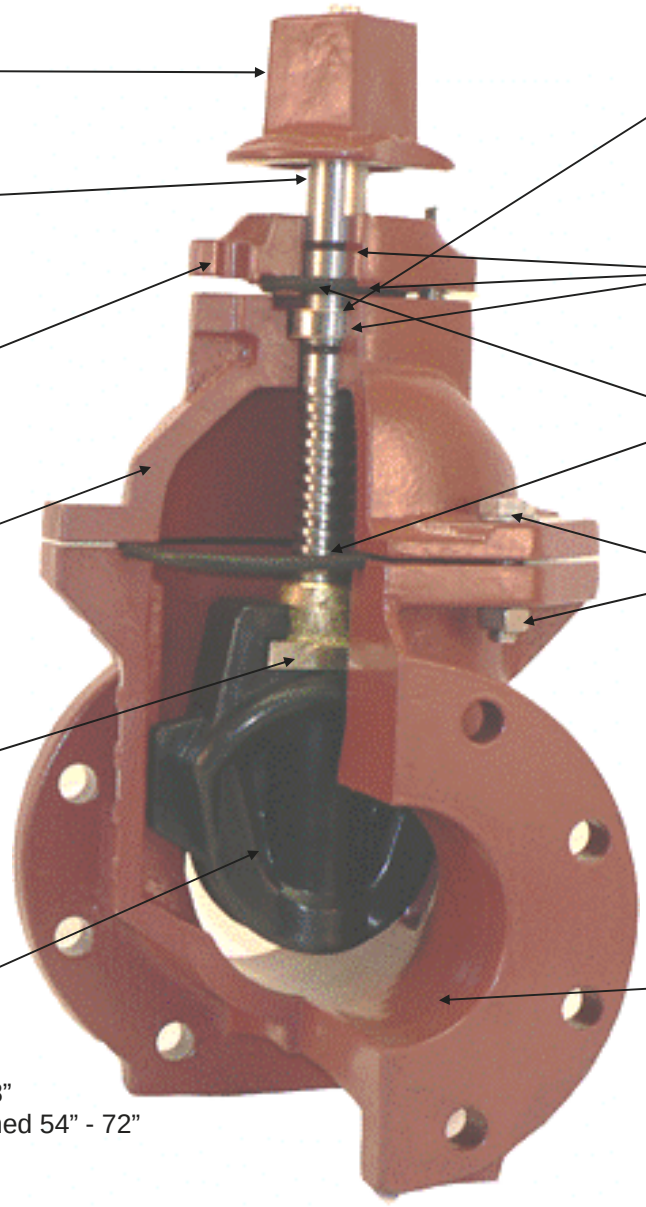

2” Operating Nut
Ductile Iron

Stem
Stainless Steel
(Bronze Available)

Gland
Ductile Iron
Thick Wall Casting

Bonnet
Ductile Iron
Thick Wall Casting

Wedge Nut
Bronze

Wedge
Ductile Iron
EPDM Encapsulated 2”- 48”
EPDM Mechanically Retained 54” - 72”

Integral Thrust Collar with 2 Thrust Washers
Copper

Triple O-Ring Stem Seals
EPDM

O-Ring Gasket
EPDM

Nuts, Bolts, Washers
Stainless Steel

Body
Ductile Iron
Thick Wall Casting
NSF/ANSI 61 Approved
Fusion Bonded Epoxy Coated Inside and Outside per AWWA C550*